

FIG. 1A (PRIOR ART)

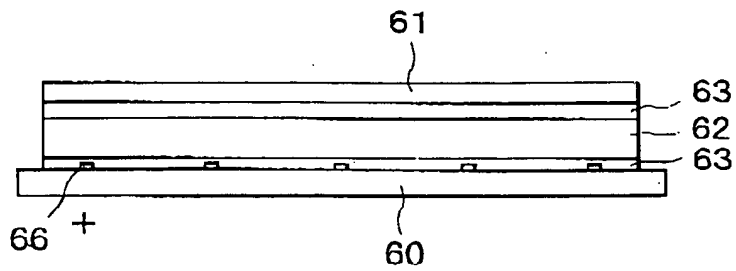


FIG. 1B (PRIOR ART)

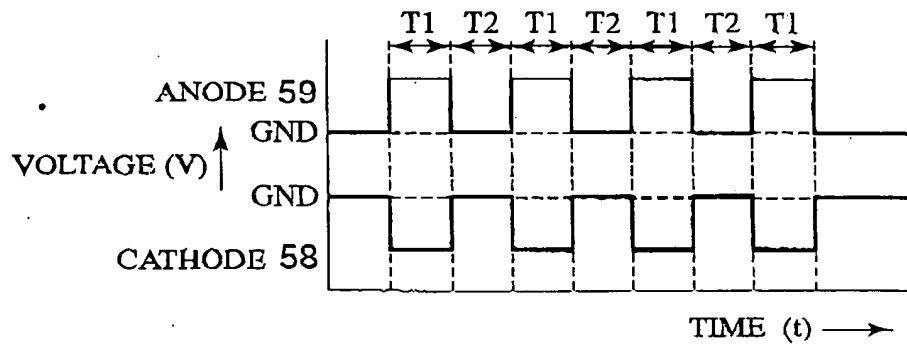


FIG.2 (PRIOR ART)

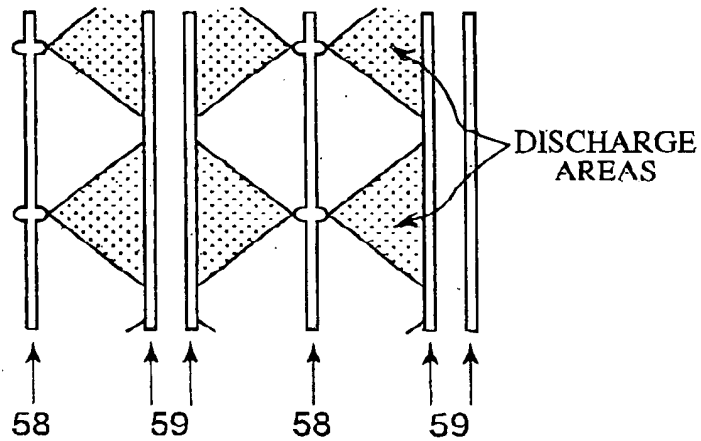


FIG.3 (PRIOR ART)

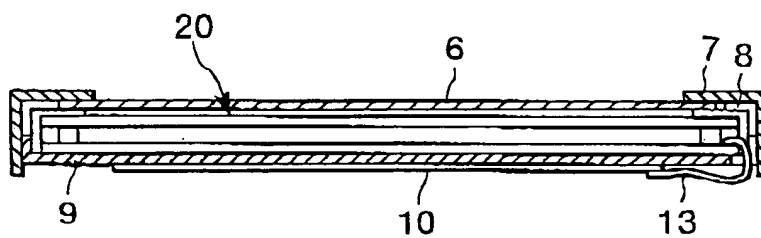


FIG. 4

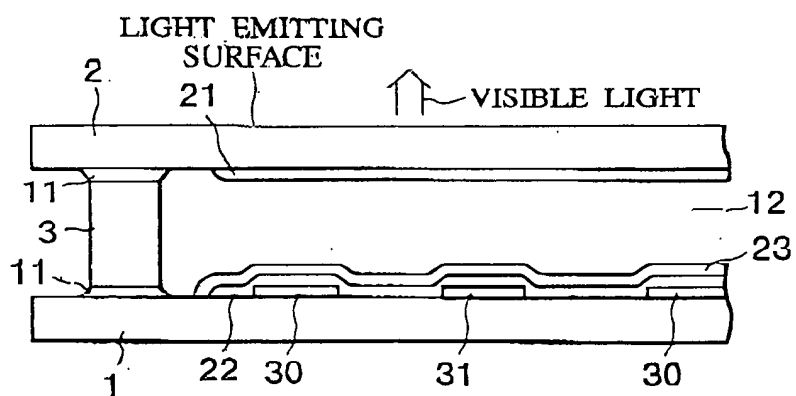


FIG. 5

2025-03-14 10:45:00

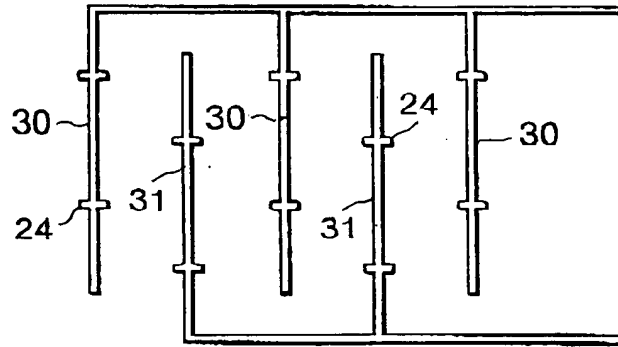


FIG.6

FIG.7A

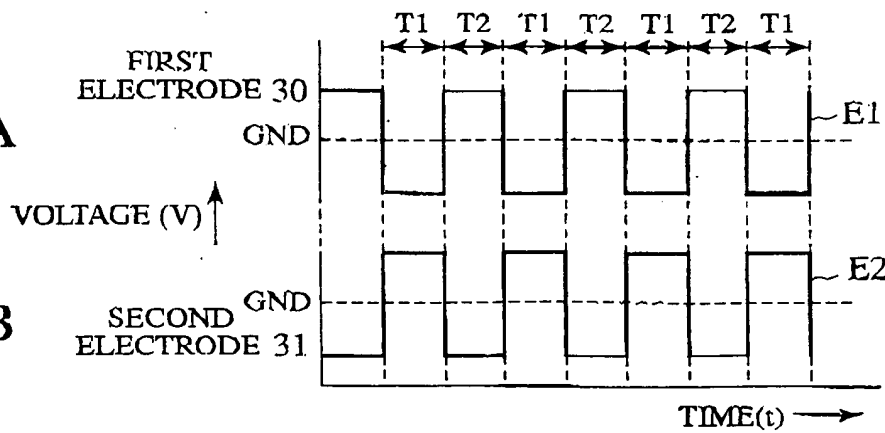


FIG.7B

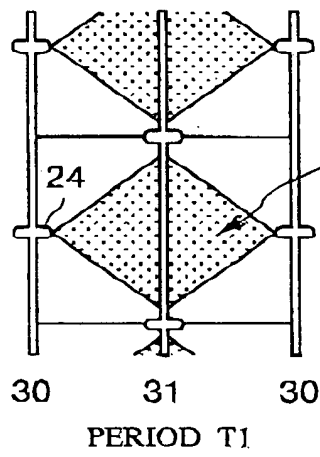


FIG.8A

DISCHARGE  
AREAS

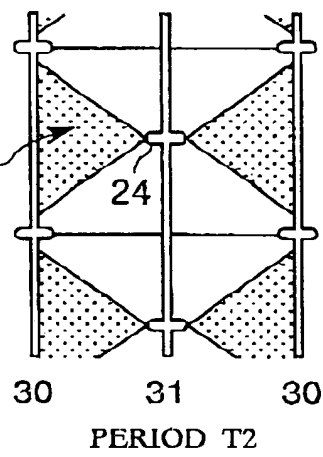


FIG.8B

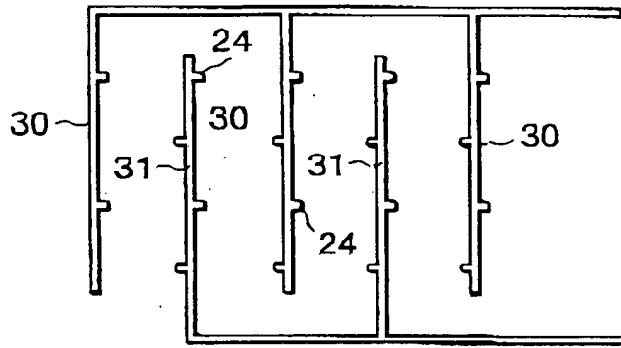


FIG. 9

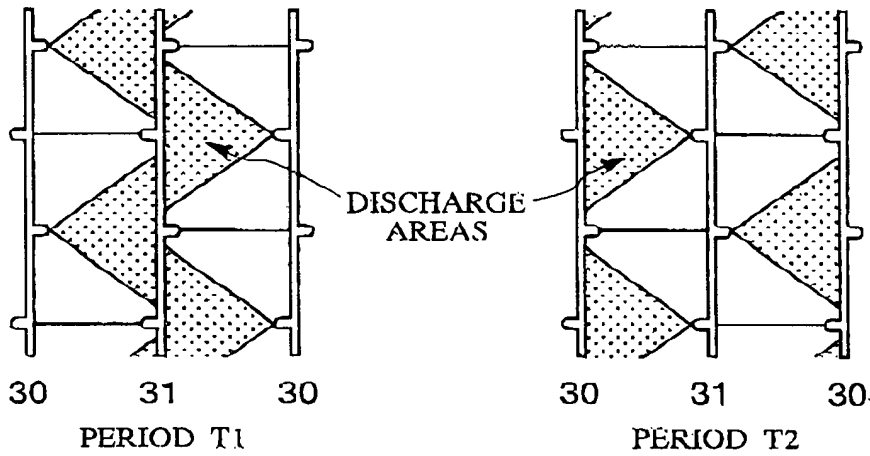


FIG. 10A

FIG. 10B

2024-03-05 14:00

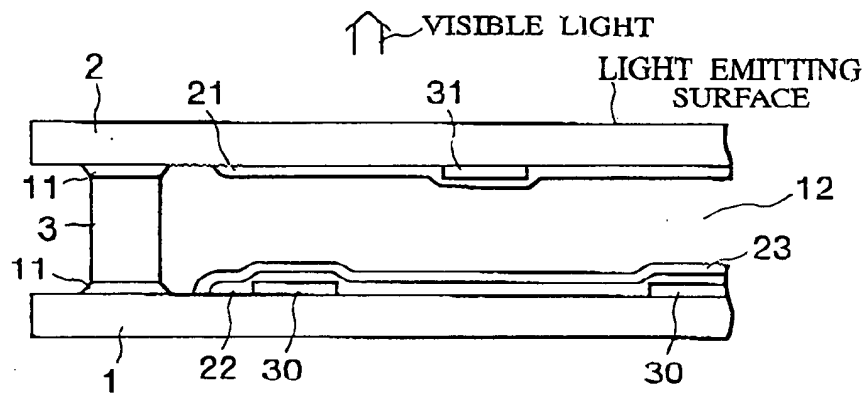


FIG.11

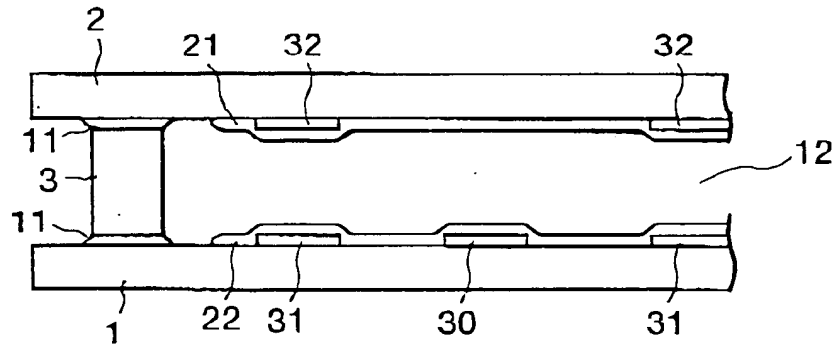


FIG. 12

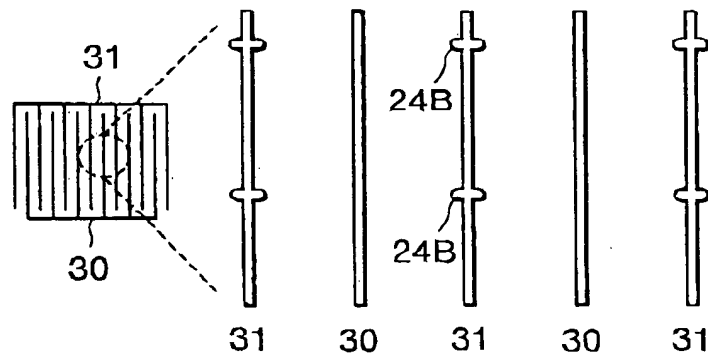


FIG. 12A

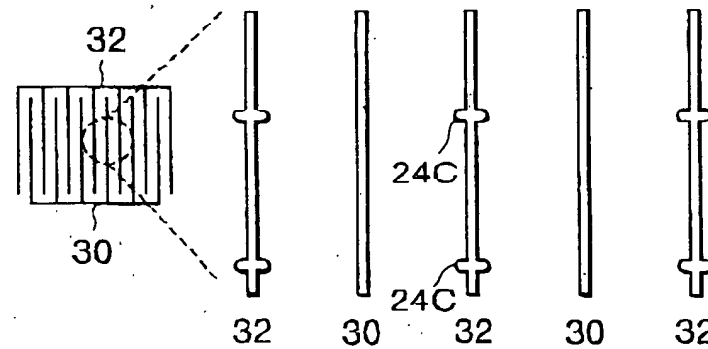


FIG. 12B



FIG. 13B

FIG.13C




FIG. 14A






FIG. 14B

10/14

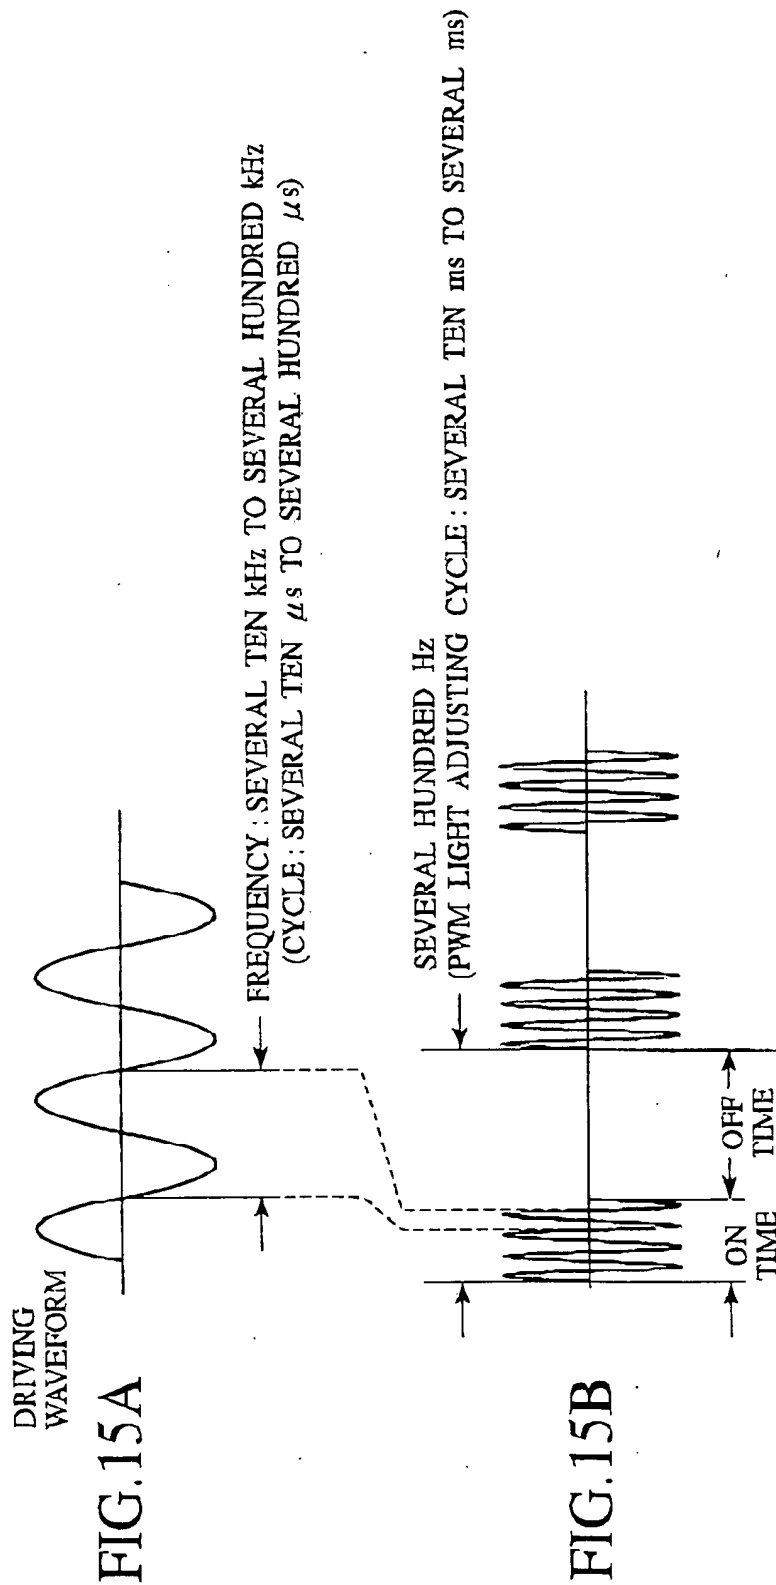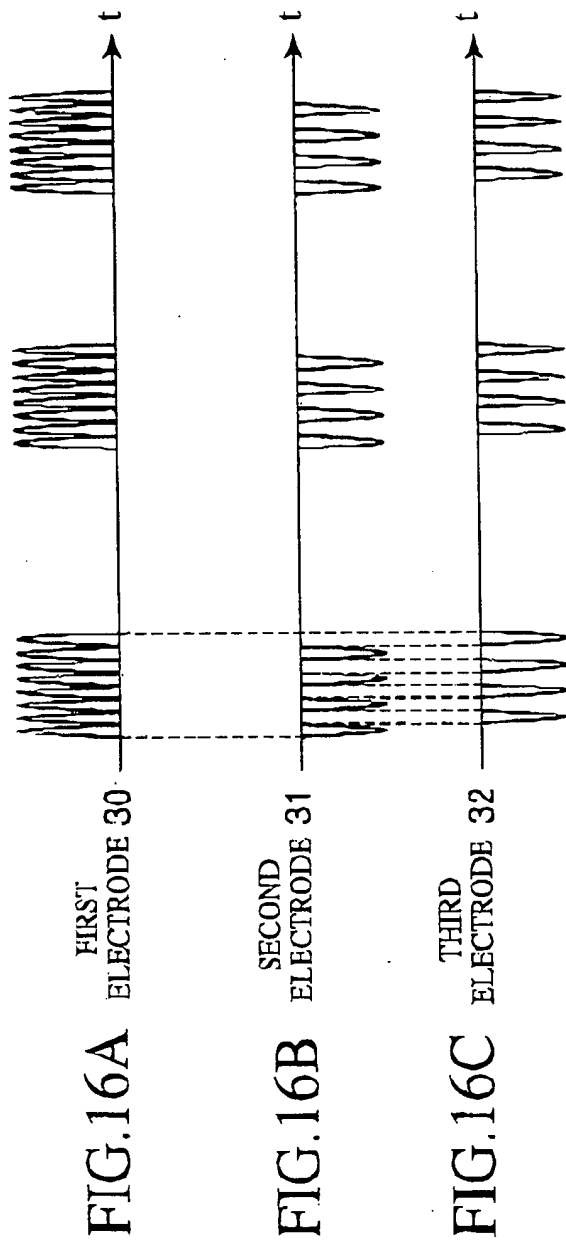

FOR EXAMPLE, 10% LIGHT ADJUSTING DEGREE MEANS  
EQUATION "ON TIME / PWM LIGHT ADJUSTING CYCLE = 10%" IS SATISFIED



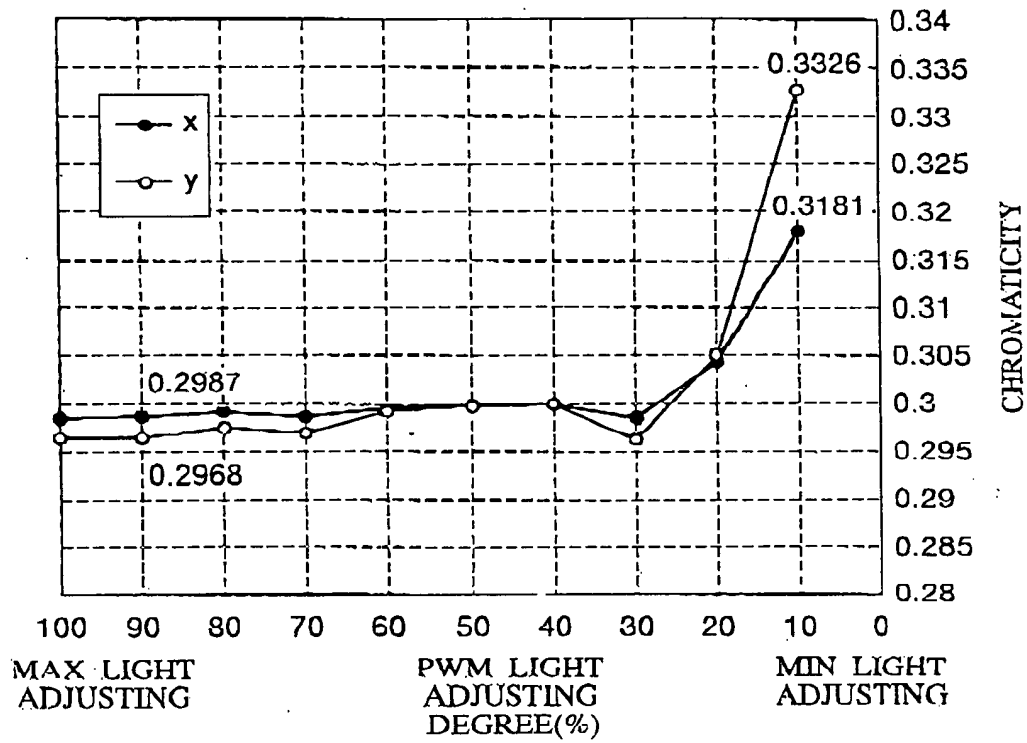


FIG.17




FIG. 18A



FIG. 18B




FIG. 18C

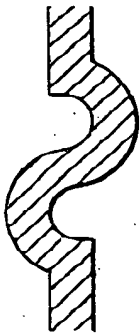


FIG. 18D




FIG. 18E

10074756-024202

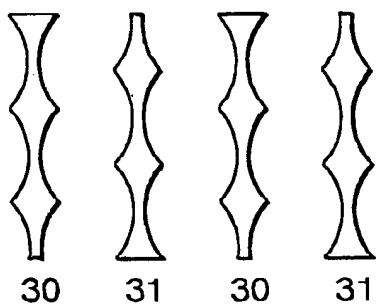


FIG. 19A

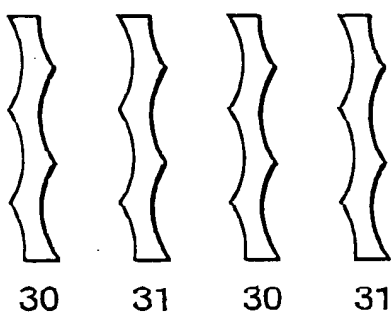


FIG. 19B

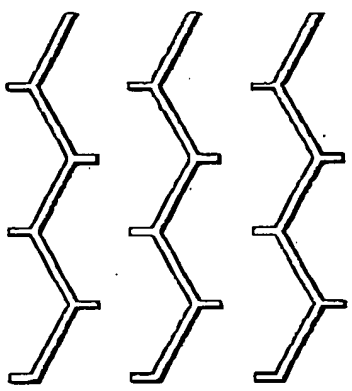


FIG. 19C

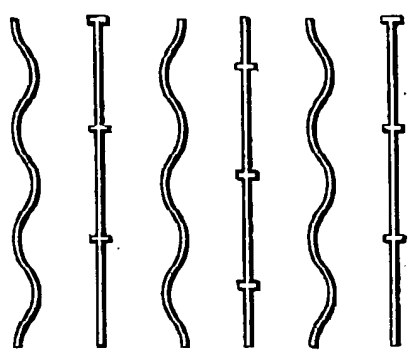


FIG. 19D

202129 95742001